



San Joaquin Valley

AIR POLLUTION CONTROL DISTRICT

OCT 12 2012

James Foster
Golden State Vintners/Franzia-McFarland
PO Box 90
Tracy, CA 95378


**Re: Notice of Final Action - Title V Permit
District Facility # S-882
Project # S-1110989**

Dear Mr. Foster:

The District has issued the Final Title V Permit for Golden State Vintners/Franzia-McFarland. The preliminary decision for this project was made on August 31, 2012. No comments were received subsequent to the District preliminary decision. Enclosed are the Final Title V Permit and public notice to be published approximately three days from the date of this letter.

Thank you for your cooperation in this matter. Should you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

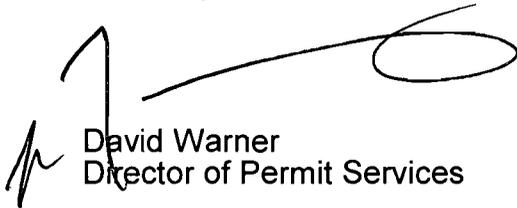

David Warner
Director of Permit Services

Attachments

cc: Juscelino Siongco, Permit Services Engineer

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061
www.valleyair.org

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: (661) 392-5500 FAX: (661) 392-5585



San Joaquin Valley

AIR POLLUTION CONTROL DISTRICT

OCT 12 2012

Gerardo C. Rios, Chief
Permits Office (AIR-3)
U.S. EPA - Region IX
75 Hawthorne St
San Francisco, CA 94105


**Re: Notice of Final Action - Title V Permit
District Facility # S-882
Project # S-1110989**

Dear Mr. Rios:

The District has issued the Final Title V Permit for Golden State Vintners/Franzia-McFarland. The preliminary decision for this project was made on August 31, 2012. No comments were received subsequent to the District preliminary decision. Enclosed are the Final Title V Permit and public notice to be published approximately three days from the date of this letter.

I would like to thank you and your staff for working with us. We appreciate your concurrence with this action. Should you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

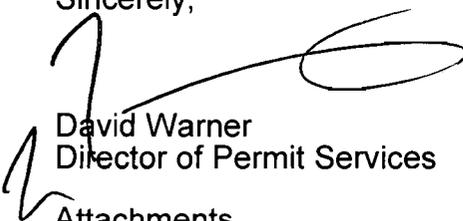

David Warner
Director of Permit Services

Attachments

cc: Juscelino Siongco, Permit Services Engineer

Seyed Sadredin

Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061
www.valleyair.org

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: (661) 392-5500 FAX: (661) 392-5585



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

OCT 12 2012

Mike Tollstrup, Chief
Project Assessment Branch
Air Resources Board
P O Box 2815
Sacramento, CA 95812-2815


**Re: Notice of Final Action - Title V Permit
District Facility # S-882
Project # S-1110989**

Dear Mr. Tollstrup:

The District has issued the Final Title V Permit for Golden State Vintners/Franzia-McFarland. The preliminary decision for this project was made on August 31, 2012. No comments were received subsequent to the District preliminary decision. Enclosed are the Final Title V Permit and public notice to be published approximately three days from the date of this letter.

I would like to thank you and your staff for working with us. Should you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

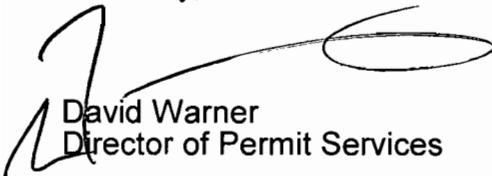

David Warner
Director of Permit Services

Attachments

cc: Juscelino Siongco, Permit Services Engineer

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061
www.valleyair.org

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: (661) 392-5500 FAX: (661) 392-5585

**SAN JOAQUIN VALLEY
AIR POLLUTION CONTROL DISTRICT
NOTICE OF FINAL DECISION TO ISSUE
FEDERALLY MANDATED OPERATING PERMIT**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Air Pollution Control District has made its final decision to issue the initial Federally Mandated Operating Permit to Golden State Vintners/Franzia-McFarland for its wine and brandy production facility, 31795 Whisler Rd, McFarland, California.

The District's analysis of the legal and factual basis for this proposed action, project #S-1110989, is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and the District office at the address below. For additional information regarding this matter, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900, or contact David Warner, Director of Permit Services, in writing at SAN JOAQUIN VALLEY AIR POLLUTION CONTROL DISTRICT, 1990 E. GETTYSBURG AVE, FRESNO, CA 93726-0244.



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

Permit to Operate

FACILITY: S-882

EXPIRATION DATE: 01/31/2017

LEGAL OWNER OR OPERATOR:
MAILING ADDRESS:

GOLDEN STATE VINTNERS/FRANZIA-MCFARLAND
ATTN: A/P 1931
PO BOX 90
TRACY, CA 95378-0090

FACILITY LOCATION:

31795 WHISLER RD
MCFARLAND, CA 93250

FACILITY DESCRIPTION:

WINE AND BRANDY

The Facility's Permit to Operate may include Facility-wide Requirements as well as requirements that apply to specific permit units.

This Permit to Operate remains valid through the permit expiration date listed above, subject to payment of annual permit fees and compliance with permit conditions and all applicable local, state, and federal regulations. This permit is valid only at the location specified above, and becomes void upon any transfer of ownership or location. Any modification of the equipment or operation, as defined in District Rule 2201, will require prior District approval. This permit shall be posted as prescribed in District Rule 2010.

Seyed Sadredin
Executive Director / APCO

David Warner
Director of Permit Services

San Joaquin Valley Air Pollution Control District

FACILITY: S-882-0-1

EXPIRATION DATE: 01/31/2017

FACILITY-WIDE REQUIREMENTS

1. The owner or operator shall notify the District of any breakdown condition as soon as reasonably possible, but no later than one hour after its detection, unless the owner or operator demonstrates to the District's satisfaction that the longer reporting period was necessary. [District Rule 1100, 6.1; County Rules 110 (Fresno, Stanislaus, San Joaquin); 109 (Merced); 113 (Madera); and 111 (Kern, Tulare, Kings)] Federally Enforceable Through Title V Permit
2. The District shall be notified in writing within ten days following the correction of any breakdown condition. The breakdown notification shall include a description of the equipment malfunction or failure, the date and cause of the initial failure, the estimated emissions in excess of those allowed, and the methods utilized to restore normal operations. [District Rule 1100, 7.0; County Rules 110 (Fresno, Stanislaus, San Joaquin); 109 (Merced); 113 (Madera); and 111 (Kern, Tulare, Kings)] Federally Enforceable Through Title V Permit
3. The owner or operator of any stationary source operation that emits more than 25 tons per year of nitrogen oxides or reactive organic compounds, shall provide the District annually with a written statement in such form and at such time as the District prescribes, showing actual emissions of nitrogen oxides and reactive organic compounds from that source. [District Rule 1160, 5.0] Federally Enforceable Through Title V Permit
4. Any person building, altering or replacing any operation, article, machine, equipment, or other contrivance, the use of which may cause the issuance of air contaminants or the use of which may eliminate, reduce, or control the issuance of air contaminants, shall first obtain an Authority to Construct (ATC) from the District unless exempted by District Rule 2020 (12/20/07). [District Rule 2010, 3.0 and 4.0; and 2020] Federally Enforceable Through Title V Permit
5. The permittee must comply with all conditions of the permit including permit revisions originated by the District. All terms and conditions of a permit that are required pursuant to the Clean Air Act (CAA), including provisions to limit potential to emit, are enforceable by the EPA and Citizens under the CAA. Any permit noncompliance constitutes a violation of the CAA and the District Rules and Regulations, and is grounds for enforcement action, for permit termination, revocation, reopening and reissuance, or modification; or for denial of a permit renewal application. [District Rules 2070, 7.0; 2080; and 2520, 9.9.1 and 9.13.1] Federally Enforceable Through Title V Permit
6. A Permit to Operate or an Authority to Construct shall not be transferred unless a new application is filed with and approved by the District. [District Rule 2031] Federally Enforceable Through Title V Permit
7. Every application for a permit required under Rule 2010 (12/17/92) shall be filed in a manner and form prescribed by the District. [District Rule 2040] Federally Enforceable Through Title V Permit
8. The operator shall maintain records of required monitoring that include: 1) the date, place, and time of sampling or measurement; 2) the date(s) analyses were performed; 3) the company or entity that performed the analysis; 4) the analytical techniques or methods used; 5) the results of such analysis; and 6) the operating conditions at the time of sampling or measurement. [District Rule 2520, 9.4.1] Federally Enforceable Through Title V Permit
9. The operator shall retain records of all required monitoring data and support information for a period of at least 5 years from the date of the monitoring sample, measurement, or report. Support information includes copies of all reports required by the permit and, for continuous monitoring instrumentation, all calibration and maintenance records and all original strip-chart recordings. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate. Any amendments to these Facility-wide Requirements that affect specific Permit Units may constitute modification of those Permit Units.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND
Location: 31795 WHISLER RD, MCFARLAND, CA 93250
S-882-0-1: Oct 11 2012 10:24AM - SIONGCOJ

10. The operator shall submit reports of any required monitoring at least every six months unless a different frequency is required by an applicable requirement. All instances of deviations from permit requirements must be clearly identified in such reports. [District Rule 2520, 9.5.1] Federally Enforceable Through Title V Permit
11. Deviations from permit conditions must be promptly reported, including deviations attributable to upset conditions, as defined in the permit. For the purpose of this condition, promptly means as soon as reasonably possible, but no later than 10 days after detection. The report shall include the probable cause of such deviations, and any corrective actions or preventive measures taken. All required reports must be certified by a responsible official consistent with section 10.0 of District Rule 2520 (6/21/01). [District Rules 2520, 9.5.2 and 1100, 7.0] Federally Enforceable Through Title V Permit
12. If for any reason a permit requirement or condition is being challenged for its constitutionality or validity by a court of competent jurisdiction, the outcome of such challenge shall not affect or invalidate the remainder of the conditions or requirements in that permit. [District Rule 2520, 9.7] Federally Enforceable Through Title V Permit
13. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of the permit. [District Rule 2520, 9.8.2] Federally Enforceable Through Title V Permit
14. The permit may be modified, revoked, reopened and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition. [District Rule 2520, 9.8.3] Federally Enforceable Through Title V Permit
15. The permit does not convey any property rights of any sort, or any exclusive privilege. [District Rule 2520, 9.8.4] Federally Enforceable Through Title V Permit
16. The Permittee shall furnish to the District, within a reasonable time, any information that the District may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit or to determine compliance with the permit. Upon request, the permittee shall also furnish to the District copies of records required to be kept by the permit or, for information claimed to be confidential, the permittee may furnish such records directly to EPA along with a claim of confidentiality. [District Rule 2520, 9.8.5] Federally Enforceable Through Title V Permit
17. The permittee shall pay annual permit fees and other applicable fees as prescribed in Regulation III of the District Rules and Regulations. [District Rule 2520, 9.9] Federally Enforceable Through Title V Permit
18. Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to enter the permittee's premises where a permitted source is located or emissions related activity is conducted, or where records must be kept under condition of the permit. [District Rule 2520, 9.13.2.1] Federally Enforceable Through Title V Permit
19. Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to have access to and copy, at reasonable times, any records that must be kept under the conditions of the permit. [District Rule 2520, 9.13.2.2] Federally Enforceable Through Title V Permit
20. Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to inspect at reasonable times any facilities, equipment, practices, or operations regulated or required under the permit. [District Rule 2520, 9.13.2.3] Federally Enforceable Through Title V Permit
21. Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to sample or monitor, at reasonable times, substances or parameters for the purpose of assuring compliance with the permit or applicable requirements. [District Rule 2520, 9.13.2.4] Federally Enforceable Through Title V Permit
22. No air contaminants shall be discharged into the atmosphere for a period or periods aggregating more than 3 minutes in any one hour which is as dark or darker than Ringelmann #1 or equivalent to 20% opacity and greater, unless specifically exempted by District Rule 4101 (02/17/05). If the equipment or operation is subject to a more stringent visible emission standard as prescribed in a permit condition, the more stringent visible emission limit shall supersede this condition. [District Rule 4101, and County Rules 401 (in all eight counties in the San Joaquin Valley)] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

23. No person shall manufacture, blend, repackage, supply, sell, solicit or apply any architectural coating with a VOC content in excess of the corresponding limit specified in Table of Standards 1 effective until 12/30/10 or Table of Standards 2 effective on and after 1/1/11 of District Rule 4601 (12/17/09) for use or sale within the District. [District Rule 4601, 5.1] Federally Enforceable Through Title V Permit
24. All VOC-containing materials subject to Rule 4601 (12/17/09) shall be stored in closed containers when not in use. [District Rule 4601, 5.4] Federally Enforceable Through Title V Permit
25. The permittee shall comply with all the Labeling and Test Methods requirements outlined in Rule 4601 sections 6.1 and 6.3 (12/17/09). [District Rule 4601, 6.1 and 6.3] Federally Enforceable Through Title V Permit
26. With each report or document submitted under a permit requirement or a request for information by the District or EPA, the permittee shall include a certification of truth, accuracy, and completeness by a responsible official. [District Rule 2520, 9.13.1 and 10.0] Federally Enforceable Through Title V Permit
27. If the permittee performs maintenance on, or services, repairs, or disposes of appliances, the permittee shall comply with the standards for Recycling and Emissions Reduction pursuant to 40 CFR Part 82, Subpart F. [40 CFR 82 Subpart F] Federally Enforceable Through Title V Permit
28. If the permittee performs service on motor vehicles when this service involves the ozone-depleting refrigerant in the motor vehicle air conditioner (MVAC), the permittee shall comply with the standards for Servicing of Motor Vehicle Air Conditioners pursuant to all the applicable requirements as specified in 40 CFR Part 82, Subpart B. [40 CFR Part 82, Subpart B] Federally Enforceable Through Title V Permit
29. Disturbances of soil related to any construction, demolition, excavation, extraction, or other earthmoving activities shall comply with the requirements for fugitive dust control in District Rule 8021 unless specifically exempted under Section 4.0 of Rule 8021 (8/19/2004) or Rule 8011 (8/19/2004). [District Rule 8021 and 8011] Federally Enforceable Through Title V Permit
30. Outdoor handling, storage and transport of any bulk material which emits dust shall comply with the requirements of District Rule 8031, unless specifically exempted under Section 4.0 of Rule 8031 (8/19/2004) or Rule 8011 (8/19/2004). [District Rule 8031 and 8011] Federally Enforceable Through Title V Permit
31. An owner/operator shall prevent or cleanup any carryout or trackout in accordance with the requirements of District Rule 8041 Section 5.0, unless specifically exempted under Section 4.0 of Rule 8041 (8/19/2004) or Rule 8011 (8/19/2004). [District Rule 8041 and 8011] Federally Enforceable Through Title V Permit
32. Whenever open areas are disturbed, or vehicles are used in open areas, the facility shall comply with the requirements of Section 5.0 of District Rule 8051, unless specifically exempted under Section 4.0 of Rule 8051 (8/19/2004) or Rule 8011 (8/19/2004). [District Rule 8051 and 8011] Federally Enforceable Through Title V Permit
33. Any paved road or unpaved road shall comply with the requirements of District Rule 8061 unless specifically exempted under Section 4.0 of Rule 8061 (8/19/2004) or Rule 8011 (8/19/2004). [District Rule 8061 and Rule 8011] Federally Enforceable Through Title V Permit
34. Any unpaved vehicle/equipment area that anticipates more than 50 Average annual daily Trips (AADT) shall comply with the requirements of Section 5.1.1 of District Rule 8071. Any unpaved vehicle/equipment area that anticipates more than 150 vehicle trips per day (VDT) shall comply with the requirements of Section 5.1.2 of District Rule 8071. On each day that 25 or more VDT with 3 or more axles will occur on an unpaved vehicle/equipment traffic area, the owner/operator shall comply with the requirements of Section 5.1.3 of District Rule 8071. On each day when a special event will result in 1,000 or more vehicles that will travel/park on an unpaved area, the owner/operator shall comply with the requirements of Section 5.1.4 of District Rule 8071. All sources shall comply with the requirements of Section 5.0 of District Rule 8071 unless specifically exempted under Section 4.0 of Rule 8071 (9/16/2004) or Rule 8011 (8/19/2004). [District Rule 8071 and Rule 8011] Federally Enforceable Through Title V Permit
35. Any owner or operator of a demolition or renovation activity, as defined in 40 CFR 61.141, shall comply with the applicable inspection, notification, removal, and disposal procedures for asbestos containing materials as specified in 40 CFR 61.145 (Standard for Demolition and Renovation). [40 CFR 61 Subpart M] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

36. The permittee shall submit certifications of compliance with the terms and standards contained in Title V permits, including emission limits, standards and work practices, to the District and the EPA annually (or more frequently as specified in an applicable requirement or as specified by the District). The certification shall include the identification of each permit term or condition, the compliance status, whether compliance was continuous or intermittent, the methods used for determining the compliance status, and any other facts required by the District to determine the compliance status of the source. [District Rule 2520, 9.16] Federally Enforceable Through Title V Permit
37. The permittee shall submit an application for Title V permit renewal to the District at least six months, but not greater than 18 months, prior to the permit expiration date. [District Rule 2520, 5.2] Federally Enforceable Through Title V Permit
38. When a term is not defined in a Title V permit condition, the definition in the rule cited as the origin and authority for the condition in a Title V permits shall apply. [District Rule 2520, 9.1.1] Federally Enforceable Through Title V Permit
39. Compliance with permit conditions in the Title V permit shall be deemed in compliance with the following outdated SIP requirements: Rule 401 (Madera, Fresno, Kern, Kings, San Joaquin, Stanislaus, Tulare and Merced), Rule 110 (Fresno, Stanislaus, San Joaquin), Rule 109 (Merced), Rule 113 (Madera), Rule 111 (Kern, Tulare, Kings), and Rule 202 (Fresno, Kern, Tulare, Kings, Madera, Stanislaus, Merced, San Joaquin). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
40. Compliance with permit conditions in the Title V permit shall be deemed in compliance with the following applicable requirements: SJVUAPCD Rules 1100, sections 6.1 and 7.0 (12/17/92); 2010, sections 3.0 and 4.0 (12/17/92); 2031 (12/17/92); 2040 (12/17/92); 2070, section 7.0 (12/17/92); 2080 (12/17/92); 4101 (2/17/05); 4601 (12/17/09); 8021 (8/19/2004); 8031 (8/19/2004); 8041 (8/19/2004); 8051 (8/19/2004); 8061 (8/19/2004); and 8071 (9/16/2004). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
41. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
42. This facility shall annually achieve the Required Annual Emission Reductions (RAER) as specified in the facility's APCO-approved Three-Year Compliance Plan for District Rule 4694. [District Rule 4694]
43. A Three-Year Compliance Plan that demonstrates compliance with the requirements of Section 5.1 of District Rule 4694 for each year of the applicable compliance period shall be submitted to the District by no later than December 1, 2006, and every three years thereafter on or before December 1. [District Rule 4694]
44. A Three-Year Compliance Plan Verification that demonstrates that the Three-Year Compliance Plan elements are in effect shall be submitted to the District by no later than July 1, 2007, and every three years thereafter on or before July 1. [District Rule 4694]
45. An Annual Compliance Plan Demonstration that shows compliance with the applicable requirements of this rule shall be submitted to the District by no later than February 1, 2008, and every year thereafter on or before February 1. [District Rule 4694]
46. Operators using CER to mitigate fermentation emissions shall perform all monitoring and recordkeeping, as established in their approved Three-Year Compliance Plan, and shall maintain all records necessary to demonstrate compliance. [District Rule 4694]
47. On October 31, 2012, the initial Title V permit was issued. The reporting periods for the Report of Required Monitoring and the Compliance Certification Report are based upon this initial permit issuance date, unless alternative dates are approved by the District Compliance Division. These reports are due within 30 days after the end of the reporting period. [District Rule 2520] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-1-6

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

29.3 MMBTU/HR SELLERS ENGINEERING MODEL 105-E NATURAL GAS-FIRED BOILER WITH A LOW NOX BURNER

PERMIT UNIT REQUIREMENTS

1. Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201] Federally Enforceable Through Title V Permit
2. All equipment shall be maintained in good operating condition and shall be operated in a manner to minimize emissions of air contaminants into the atmosphere. [District Rule 2201] Federally Enforceable Through Title V Permit
3. The unit shall only be fired on PUC-regulated natural gas. [District Rule 2201] Federally Enforceable Through Title V Permit
4. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of natural gas combusted in the unit shall be installed, utilized and maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
5. Maximum annual heat input of the unit shall not exceed 30 billion Btu per calendar year (equivalent to a total natural gas consumption rate of 30 million scf/year). [District Rules 2201, 4305 and 4306] Federally Enforceable Through Title V Permit
6. Emissions rates from the natural gas-fired unit shall not exceed any of the following limits: 30 ppmvd NO_x @ 3% O₂ or 0.036 lb-NO_x/MMBtu, 0.00285 lb-SO_x/MMBtu, 0.0076 lb-PM₁₀/MMBtu, 400 ppmvd CO @ 3% O₂ or 0.2911 lb-CO/MMBtu, or 0.0055 lb-VOC/MMBtu. [District Rules 2201, 4305 and 4306] Federally Enforceable Through Title V Permit
7. The permittee shall monitor and record the stack concentration of NO_x, CO, and O₂ at least once every month (in which a source test is not performed) using a portable emission monitor that meets District specifications. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
8. If either the NO_x or CO concentrations corrected to 3% O₂, as measured by the portable analyzer, exceed the allowable emissions concentration, the permittee shall return the emissions to within the acceptable range as soon as possible, but no longer than 1 hour of operation after detection. If the portable analyzer readings continue to exceed the allowable emissions concentration after 1 hour of operation after detection, the permittee shall notify the District within the following 1 hour and conduct a certified source test within 60 days of the first exceedance. In lieu of conducting a source test, the permittee may stipulate a violation has occurred, subject to enforcement action. The permittee must then correct the violation, show compliance has been re-established, and resume monitoring procedures. If the deviations are the result of a qualifying breakdown condition pursuant to Rule 1100, the permittee may fully comply with Rule 1100 in lieu of performing the notification and testing required by this condition. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

9. All alternate monitoring parameter emission readings shall be taken with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. The analyzer shall be calibrated, maintained, and operated in accordance with the manufacturer's specifications and recommendations or a protocol approved by the APCO. Emission readings taken shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15 consecutive-minute sample reading or by taking at least five (5) readings, evenly spaced out over the 15 consecutive-minute period. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
10. The permittee shall maintain records of: (1) the date and time of NO_x, CO, and O₂ measurements, (2) the O₂ concentration in percent and the measured NO_x and CO concentrations corrected to 3% O₂, (3) make and model of exhaust gas analyzer, (4) exhaust gas analyzer calibration records, and (5) a description of any corrective action taken to maintain the emissions within the acceptable range. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
11. All emissions measurements shall be made with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. No determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0 of District Rule 4306. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
12. Source testing to measure NO_x and CO emissions from this unit while fired on natural gas shall be conducted at least once every twelve (12) months. After demonstrating compliance on two (2) consecutive annual source tests, the unit shall be tested not less than once every thirty-six (36) months. If the result of the 36-month source test demonstrates that the unit does not meet the applicable emission limits, the source testing frequency shall revert to at least once every twelve (12) months. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
13. The source test plan shall identify which basis (ppmv or lb/MMBtu) will be used to demonstrate compliance. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
14. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. [District Rule 1081] Federally Enforceable Through Title V Permit
15. NO_x emissions for source test purposes shall be determined using EPA Method 7E or ARB Method 100 on a ppmv basis, or EPA Method 19 on a heat input basis. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
16. CO emissions for source test purposes shall be determined using EPA Method 10 or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
17. Stack gas oxygen (O₂) shall be determined using EPA Method 3 or 3A or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
18. For emissions source testing, the arithmetic average of three 30-consecutive-minute test runs shall apply. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
19. The results of each source test shall be submitted to the District within 60 days thereafter. [District Rule 1081] Federally Enforceable Through Title V Permit
20. The owner or operator shall record and maintain records of the amount of fuel combusted during each operating day. [40 CFR 60.48c(g)(1)] Federally Enforceable Through Title V Permit
21. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070, 4305, and 4306] Federally Enforceable Through Title V Permit
22. Instead of paying an annual emissions fee per District Rule 4320 (10/16/08), Section 5.1.2, the boiler shall be in full compliance with District Rule 4320, Section 5.2, Table 1, Category E, on and after January 1, 2014. [District Rule 4320] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

23. Pursuant to District Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NOx emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NOx emission limit listed in Rule 4320. [District Rule 4320] Federally Enforceable Through Title V Permit
24. Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320] Federally Enforceable Through Title V Permit
25. On and after July 1, 2012, the permittee shall submit an analysis showing the fuel's sulfur content at least once every year. Valid purchase contracts, supplier certifications, tariff sheets, or transportation contracts may be used to satisfy this requirement, provided they establish the fuel parameters mentioned above. [District Rule 4320] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-2-6

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

30 MMBTU/HR SELLERS ENGINEERING NATURAL GAS-FIRED BOILER, MODEL 105-E, WITH A LOW-NOX BURNER AND AN INDUCED FLUE GAS RECIRCULATION SYSTEM (SOUTH UNIT)

PERMIT UNIT REQUIREMENTS

1. Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201] Federally Enforceable Through Title V Permit
2. All equipment shall be maintained in good operating condition and shall be operated in a manner to minimize emissions of air contaminants into the atmosphere. [District Rule 2201] Federally Enforceable Through Title V Permit
3. The unit shall only be fired on PUC-regulated natural gas. [District Rule 2201] Federally Enforceable Through Title V Permit
4. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of natural gas combusted in the unit shall be installed, utilized and maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
5. Maximum annual heat input of the unit shall not exceed 30 billion Btu per calendar year. [District Rules 2201, 4305 and 4306] Federally Enforceable Through Title V Permit
6. Emissions from the natural gas-fired unit shall not exceed any of the following limits: 30 ppmvd NO_x @ 3% O₂, 0.00285 lb-SO_x/MMBtu, 0.0076 lb-PM₁₀/MMBtu, 200 ppmvd CO @ 3% O₂, or 0.0055 lb-VOC/MMBtu. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
7. The permittee shall monitor and record the stack concentration of NO_x, CO, and O₂ at least once every month (in which a source test is not performed) using a portable emission monitor that meets District specifications. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
8. If either the NO_x or CO concentrations corrected to 3% O₂, as measured by the portable analyzer, exceed the allowable emissions concentration, the permittee shall return the emissions to within the acceptable range as soon as possible, but no longer than 1 hour of operation after detection. If the portable analyzer readings continue to exceed the allowable emissions concentration after 1 hour of operation after detection, the permittee shall notify the District within the following 1 hour and conduct a certified source test within 60 days of the first exceedance. In lieu of conducting a source test, the permittee may stipulate a violation has occurred, subject to enforcement action. The permittee must then correct the violation, show compliance has been re-established, and resume monitoring procedures. If the deviations are the result of a qualifying breakdown condition pursuant to Rule 1100, the permittee may fully comply with Rule 1100 in lieu of performing the notification and testing required by this condition. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

9. All alternate monitoring parameter emission readings shall be taken with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. The analyzer shall be calibrated, maintained, and operated in accordance with the manufacturer's specifications and recommendations or a protocol approved by the APCO. Emission readings taken shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15 consecutive-minute sample reading or by taking at least five (5) readings, evenly spaced out over the 15 consecutive-minute period. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
10. The permittee shall maintain records of: (1) the date and time of NO_x, CO, and O₂ measurements, (2) the O₂ concentration in percent and the measured NO_x and CO concentrations corrected to 3% O₂, (3) make and model of exhaust gas analyzer, (4) exhaust gas analyzer calibration records, and (5) a description of any corrective action taken to maintain the emissions within the acceptable range. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
11. All emissions measurements shall be made with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. No determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0 of District Rule 4306. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
12. Source testing to measure NO_x and CO emissions from this unit while fired on natural gas shall be conducted at least once every twelve (12) months. After demonstrating compliance on two (2) consecutive annual source tests, the unit shall be tested not less than once every thirty-six (36) months. If the result of the 36-month source test demonstrates that the unit does not meet the applicable emission limits, the source testing frequency shall revert to at least once every twelve (12) months. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
13. The source test plan shall identify which basis (ppmv or lb/MMBtu) will be used to demonstrate compliance. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
14. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. [District Rule 1081] Federally Enforceable Through Title V Permit
15. NO_x emissions for source test purposes shall be determined using EPA Method 7E or ARB Method 100 on a ppmv basis, or EPA Method 19 on a heat input basis. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
16. CO emissions for source test purposes shall be determined using EPA Method 10 or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
17. Stack gas oxygen (O₂) shall be determined using EPA Method 3 or 3A or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
18. For emissions source testing, the arithmetic average of three 30-consecutive-minute test runs shall apply. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
19. The results of each source test shall be submitted to the District within 60 days thereafter. [District Rule 1081] Federally Enforceable Through Title V Permit
20. Records of monthly and annual heat input of the unit shall be maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
21. The owner or operator shall record and maintain records of the amount of fuel combusted during each operating day. [40 CFR 60.48c(g)(1)] Federally Enforceable Through Title V Permit
22. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070, 4305, and 4306] Federally Enforceable Through Title V Permit
23. Instead of paying an annual emissions fee per District Rule 4320 (10/16/08), Section 5.1.2, the boiler shall be in full compliance with District Rule 4320, Section 5.2, Table 1, Category E, on and after January 1, 2014. [District Rule 4320] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

24. Pursuant to District Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NOx emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NOx emission limit listed in Rule 4320. [District Rule 4320] Federally Enforceable Through Title V Permit
25. Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320] Federally Enforceable Through Title V Permit
26. On and after July 1, 2012, the permittee shall submit an analysis showing the fuel's sulfur content at least once every year. Valid purchase contracts, supplier certifications, tariff sheets, or transportation contracts may be used to satisfy this requirement, provided they establish the fuel parameters mentioned above. [District Rule 4320] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 Whisler Rd, MCFARLAND, CA 93250

S-882-2-6 : Oct 11 2012 10:24AM - SIONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-4-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

GASOLINE DISPENSING OPERATION WITH ONE 350 GALLON AND ONE 500 GALLON PHASE I AND PHASE II EXEMPT ABOVEGROUND GASOLINE STORAGE TANKS SERVED BY 2 NOZZLES (INSTALLED BEFORE JULY 1, 1975)

PERMIT UNIT REQUIREMENTS

1. The tank is to be equipped with a submerged fill pipe that extends to within six (6) inches of the bottom of the tank.
[District Rule 4621] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-11-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

217,443 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #1) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-12-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

217,443 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #2) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-13-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

217,443 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #3) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-14-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

217,443 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #4) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-15-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

217,443 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #5) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-16-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

217,443 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #6) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-17-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

217,443 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #7) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-18-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

217,443 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #8) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-19-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #9) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-20-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #10) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-21-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #11) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-22-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #12) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-23-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #13) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-24-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #14) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-25-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #15) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-26-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #16) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-27-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #17) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-28-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #18) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-29-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #19) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-30-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #20) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-31-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #21) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 Whisler Rd, MCFARLAND, CA 93250

S-882-31-1, Oct 11 2012 10:25AM - SONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-32-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #22) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-33-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #23) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-34-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #24) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-35-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #25) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-36-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #26) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-37-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #27) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-38-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #28) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-39-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #29) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-40-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #30) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-41-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #31) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-42-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #32) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-43-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #33) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-44-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #34) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-45-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #35) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-46-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #36) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-47-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #37) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-48-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #38) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-49-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #39) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-50-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #40) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-51-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,931 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #41) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-52-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #42) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-53-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #43) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-54-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #44) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-55-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #45) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-56-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #46) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-57-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #47) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-58-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #48) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-59-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #49) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-60-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #50) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-61-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

13,354 GALLON STEEL WINE STORAGE TANK (TANK #51) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-62-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #52) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-63-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #53) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-64-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #54) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-65-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #55) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-66-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #56) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-67-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #57) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-68-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #58) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-69-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #59) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-70-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #60) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-71-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #61) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-72-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #62) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-73-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #63) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-74-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #64) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-75-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #65) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-76-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #66) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-77-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #67) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 WHISLER RD, MCFARLAND, CA 93250

S-882-77-1; Oct 11 2012 10:26AM - SIONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-78-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #68) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-79-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #69) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-80-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #70) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-81-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

28,682 GALLON STEEL WINE STORAGE TANK (TANK #71) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-82-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

215,674 GALLON STEEL WINE STORAGE TANK (TANK #72) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-83-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

215,674 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #73) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-84-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

215,674 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #74) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-85-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

215,674 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #75) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-86-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

215,674 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #76) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. Except when used for fermentation of wine, the wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. Except when used for fermentation of wine, the pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. Except when used for fermentation of wine, the pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. Except when used for fermentation of wine, the maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Except when used for fermentation of wine, records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. Except when used for fermentation of wine, the wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
8. The following information shall be recorded for each fermentation batch processed in this tank: 1) wine type stated as either red or white wine, 2) total gallons of must fermented, 3) the uncontrolled fermentation emissions from the batch (calculated per the emission factors given in District Rule 4694). [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 Whisler Rd, MCFARLAND, CA 93250

S-882-86-1 - Oct 11 2012 10:26AM - SONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-87-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

51,416 GALLON STEEL WINE STORAGE TANK (TANK #77) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-88-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

51,416 GALLON STEEL WINE STORAGE TANK (TANK #78) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-89-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

51,416 GALLON STEEL WINE STORAGE TANK (TANK #79) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 WHISLER RD, MCFARLAND, CA 93250

S-882-89-1 Oct 11 2012 10:27AM - SIONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-90-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

51,416 GALLON STEEL WINE STORAGE TANK (TANK #80) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-91-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

51,416 GALLON STEEL WINE STORAGE TANK (TANK #81) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 WHISLER RD, MCFARLAND, CA 93250

S-882-91-1: Oct 11 2012 10:27AM - SIDNGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-92-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

51,416 GALLON STEEL WINE STORAGE TANK (TANK #82) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-93-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

51,416 GALLON STEEL WINE STORAGE TANK (TANK #83) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-94-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

51,416 GALLON STEEL WINE STORAGE TANK (TANK #84) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-95-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

7,489 GALLON STEEL WINE STORAGE TANK (TANK #85) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-96-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

7,489 GALLON STEEL WINE STORAGE TANK (TANK #86) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-97-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

6,828 GALLON STEEL WINE STORAGE TANK (TANK #87) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-98-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

6,828 GALLON STEEL WINE STORAGE TANK (TANK #88) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-99-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

6,828 GALLON STEEL WINE STORAGE TANK (TANK #89) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-100-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

6,828 GALLON STEEL WINE STORAGE TANK (TANK #90) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-101-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

6,828 GALLON STEEL WINE STORAGE TANK (TANK #91) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-102-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

6,828 GALLON STEEL WINE STORAGE TANK (TANK #92) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-103-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

6,828 GALLON STEEL WINE STORAGE TANK (TANK #93) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-104-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

6,828 GALLON STEEL WINE STORAGE TANK (TANK #94) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: S-882-105-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

2,538 GALLON STEEL WINE STORAGE TANK (TANK #95) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. See Facility-wide requirements for conditions applicable to this permit unit. [District Rule 2080] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/FRANZIA-MCFARLAND

Location: 31795 WHISLER RD, MCFARLAND, CA 93250

S-882-105-1 : Oct 11 2012 10:27AM -- SIONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-106-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

350,446 GALLON STEEL WINE STORAGE TANK (TANK #96) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-107-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

350,446 GALLON STEEL WINE STORAGE TANK (TANK #97) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-108-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

350,446 GALLON STEEL WINE STORAGE TANK (TANK #98) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-109-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

350,446 GALLON STEEL WINE STORAGE TANK (TANK #99) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 Whisler Rd, MCFARLAND, CA 93250

S-882-109-1: Oct 11 2012 10:27AM -- SIONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-110-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,314 GALLON STEEL WINE STORAGE TANK (TANK #P1) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-111-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,314 GALLON STEEL WINE STORAGE TANK (TANK #P2) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-112-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,314 GALLON STEEL WINE STORAGE TANK (TANK #P3) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-113-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,314 GALLON STEEL WINE STORAGE TANK (TANK #P4) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 WHISLER RD, MCFARLAND, CA 93250

S-882-113-1 : Oct 11 2012 10:28AM - SJONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-114-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

350,446 GALLON STEEL WINE STORAGE TANK (TANK #100) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-115-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

350,446 GALLON STEEL WINE STORAGE TANK (TANK #101) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-116-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

55,220 GALLON STEEL WINE STORAGE TANK (TANK #105) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-117-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

55,220 GALLON STEEL WINE STORAGE TANK (TANK #106) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 WHISLER RD, MCFARLAND, CA 93250

S-882-117-1 - Oct 11 2012 10:28AM -- SIONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-118-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

55,220 GALLON STEEL WINE STORAGE TANK (TANK #107) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-119-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

55,220 GALLON STEEL WINE STORAGE TANK (TANK #108) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-120-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

55,220 GALLON STEEL WINE STORAGE TANK (TANK #109) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

3

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-121-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

55,220 GALLON STEEL WINE STORAGE TANK (TANK # 110) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-122-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

55,220 GALLON STEEL WINE STORAGE TANK (TANK # 111) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-123-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

55,220 GALLON STEEL WINE STORAGE TANK (TANK # 112) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-124-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

5,469 GALLON STEEL WINE STORAGE TANK (TANK # 113) WITH PRESSURE VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rule 4694] Federally Enforceable Through Title V Permit
2. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rule 4694] Federally Enforceable Through Title V Permit
3. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694] Federally Enforceable Through Title V Permit
4. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694] Federally Enforceable Through Title V Permit
5. The maximum temperature of each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit
6. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch and the volume of wine transferred. [District Rule 4694] Federally Enforceable Through Title V Permit
7. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley
Air Pollution Control District

PERMIT UNIT: S-882-125-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:
WINERY WASTEWATER COLLECTION SUMP

PERMIT UNIT REQUIREMENTS

1. See Facility-wide requirements for conditions applicable to this permit unit. [District Rule 2080] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-126-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

106,314 GALLON ETHANOL STORAGE TANK (TANK #P-1) WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. See Facility-wide requirements for conditions applicable to this permit unit. [District Rule 2080] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 WHISLER RD, MCFARLAND, CA 93250

S-882-126-1 : Oct 11 2012 10:28AM - SIONGCOJ

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-127-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

25,252 GALLON ETHANOL STORAGE TANK (TANK #P-7) WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. See Facility-wide requirements for conditions applicable to this permit unit. [District Rule 2080] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: GOLDEN STATE VINTNERS/Franzia-MCFARLAND

Location: 31795 WHISLER RD, MCFARLAND, CA 93250

S-882-127-1 : Oct 11 2012 10:28AM -- SIONGCOJ

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: S-882-128-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

25,252 GALLON ETHANOL STORAGE TANK (TANK #P-8) WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. See Facility-wide requirements for conditions applicable to this permit unit. [District Rule 2080] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-129-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

25,252 GALLON ETHANOL STORAGE TANK (TANK #P-9) WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. See Facility-wide requirements for conditions applicable to this permit unit. [District Rule 2080] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-882-130-1

EXPIRATION DATE: 01/31/2017

EQUIPMENT DESCRIPTION:

25,252 GALLON ETHANOL STORAGE TANK (TANK #P-10) WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. See Facility-wide requirements for conditions applicable to this permit unit. [District Rule 2080] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.